





TOP VIEW



OFFSET VIEW

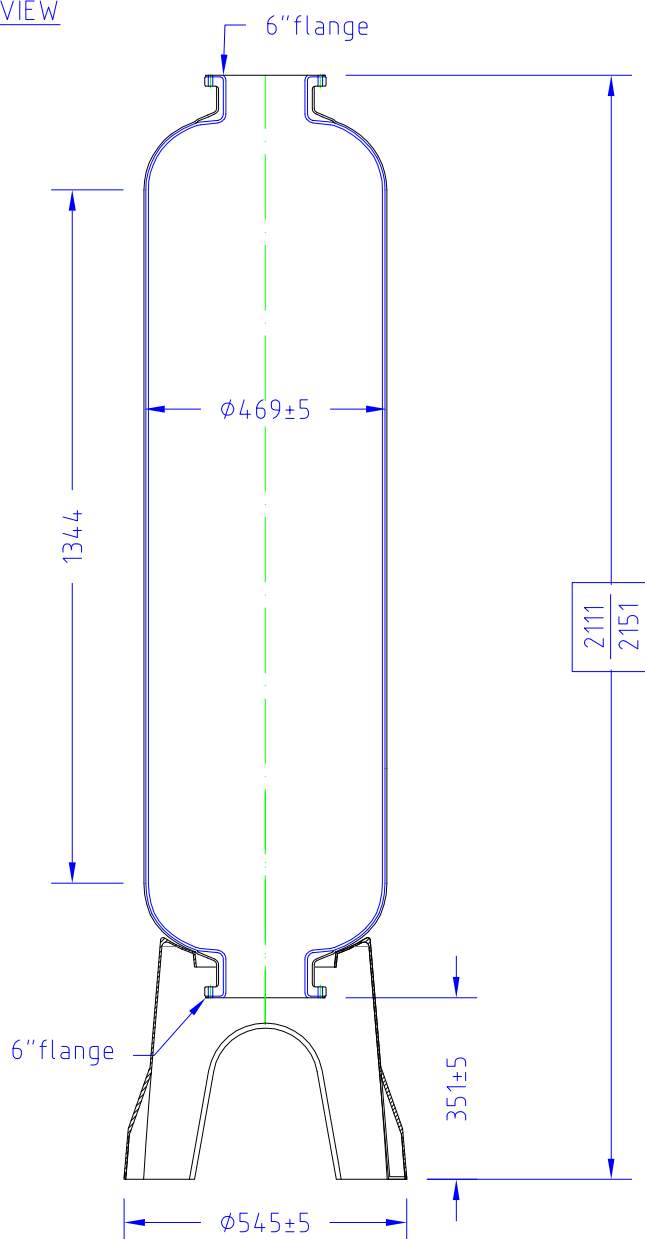

Material Inner shell : PE
 Laminate : Blue epoxy - glass laminate
 Operating pressure : min 0 bar - max 10 bar
 Testing pressure : 11 bar
 Operating temperature: min 1°C - max 65°C
 Volume tank : ±250 liter /
 Weight empty tank : ±36 kg

APPROVAL DRAWING		Location	REVISION DESCRIPTION		Approved	Date
Customer :	/	 Pentair Water Industriepark Wolfstee Toekomstlaan 30 HERENTALS BELGIUM	Article :	Scale :	none	
Quantity ordered :	/		Cad filename :	C-1868-F7HW		Date : 26 November 2014
Delivery date :	/		Model filename :	Drawn : Arnaud Cuylen		Approved : GJ./SVC.
Approval signature by customer :	Approval date :		Remarks : Boxed dims. are critical for Q.A	Material : see table	Projection : 	A 4
		Description :	NAT FLNG HOT-WATER-6T+B,BASE		Drawing number : C-1868-F7HW	