

Resinex™ A-7 UB

Strong base anion exchange resin

Resinex™ A-7 UB is a high crosslinked, high purity, premium grade, strongly basic gel-type anion exchange resin type 1, specially designed for achieving very low silica leakage in water demineralisation applications. The product is a bead type, crosslinked polystyrene-divinylbenzene copolymer resin that offers a good resistance to physical and mechanical breakage and organic fouling.

The selected bead distribution of **Resinex™ A-7 UB** - very close to monodisperse - is especially adapted for all modern counter-current systems (i.e. Schwebbett, UPCORE,..) and mixed bed systems.

Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	gel-type, white, spherical beads
Functional group	Quarternary Ammonium, Type 1
Whole bead count	95% min.
Ionic form, as shipped	Cl ⁻
Bead size	(≥ 90%) 0.50 - 0.71 mm
Uniformity coefficient	1.20 max.
Bulk density, as shipped	700 kg/m ³
Real density	1.08 g/cm ³
Water retention	42 - 48%
Total capacity (Cl ⁻ form)	1.40 eq/l min.
Volume change Cl ⁻ → OH ⁻	25% max.
Stability, temperature	60°C max.
Stability, pH	0 - 14

Standard Design Conditions

Bed depth	> 750 mm
Service flow rate	8 - 55 BV/h
Backwash expansion	50 - 75%

Key Features and Benefits

- **High Integrity Beads**
Excellent resistance to mechanical degradation ensures low pressure drop
- **Low Silica Leakage**
- **Optimized Caustic Soda Consumption**
Economical advantage
- **Resistance To Osmotic Shock**
Extended lifetime and very low number of broken beads
- **Uniform Bead Size**
Lower pressure drop and regenerant consumption
- **Perfect Separation**
Suitable for Mixed-bed applications

Typical Applications

- Demineralisation in industrial water treatment systems together with **Resinex™ K-10 UB**
- Condensate treatment in combination with **Resinex™ K-10 UB**
- Polishing mixed-bed together with **Resinex™ K-10 UB**


Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag


Resinex™ A-7 UB

Strong base anion exchange resin

Pressure Drop

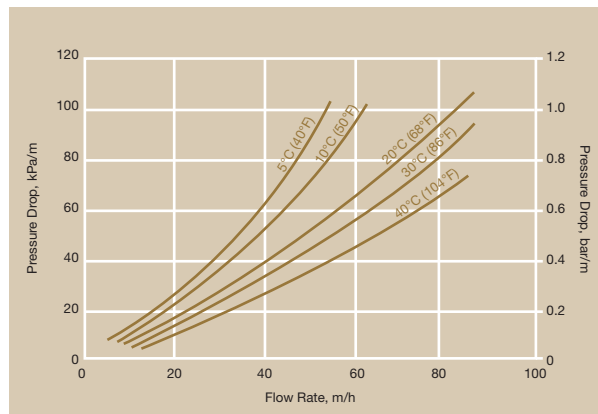

Backwash Expansion

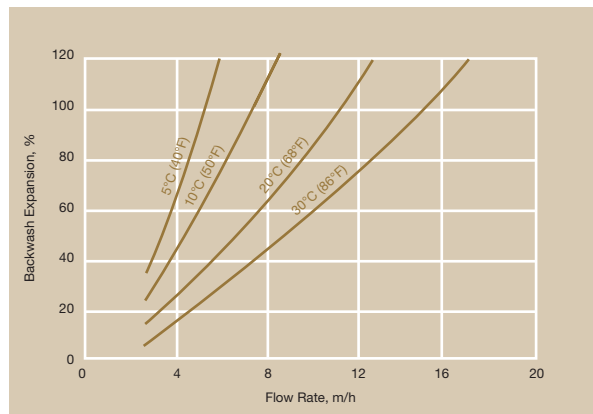

Standard Regeneration Parameters

Co-Flow

Counter-Flow

Concentration	4% NaOH	2% NaOH
Level	70-100 g/l	50-80 g/l
Flow rate regenerant	4-6 BV/h	6-8 BV/h
Contact time regenerant	30-50 min.	20-40 min.
Flow rate slow rinse	4-6 BV/h	6-8 BV/h
Slow rinse water required	2-4 BV	2 BV
Flow rate fast rinse	10-30 BV/h	10-30 BV/h
Fast rinse water required	6-10 BV	6-10 BV

The use of a weak base solution such as ammonia or sodium carbonate as a regenerant is an alternative to caustic soda. Please contact your nearest Jacobi Carbons sales office for further information.

Product Packing



25 lit. polyethylene valve bag
48 bags per pallet



Polypropylene FIBCs
(big bag), 1.000 lit.



NOTICE Jacobi Carbons reserves the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for the customers use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

CAUTION Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



SWEDEN

Jacobi Carbons AB
Varvsholmen
SE-392 30 Kalmar
Phone: +46-480-417550
FAX: +46-480-417559
Email: info@jacobi.net

FINLAND

Jacobi Carbons AB (SS)
Ruoholahdenkatu 8
SF-00180 Helsinki
Phone: +358-9-643602
FAX: +358-9-642900
Email: infofin@jacobi.net

GERMANY

Jacobi Carbons GmbH
Feldbergstraße 21
D-60323 Frankfurt/Main
Phone: +49-69-719107-0
FAX: +49-69-719107-20
Email: info@jacobi.net

UNITED STATES

Jacobi Carbons, Inc.
1335 Dublin Road Suite 217D
Columbus, OH 43215
Phone: +1-215-546-3900
FAX: +1-215-546-9921
Email: infous@jacobi.net

UNITED KINGDOM

Jacobi Carbons Ltd
E12 Croft Court, Moss Estate
WN73PT Leigh, Lancashire
Phone: +44-1942-670600
FAX: +44-1942-670605
Email: infouk@jacobi.net

MALAYSIA

Jacobi Carbons (Asia) Sdn Bhd
Lot 12070-F, Jalan Usahajaya,
Permatang Tinggi, 14100, Penang
Phone: +60-4-5882122
FAX: +60-4-5886122
Email: infoasia@jacobi.net



www.resinex-ixr.com
www.jacobi.net