

Resinex™ NC-3010

Mixed bed ion exchange resin

Resinex™ NC-3010 is a ready-to-use mixed bed resin of a strong acid cation and a strong base anion gel-type resin with an equivalent ratio of 1:1. The product is highly regenerated and specially pretreated to meet the stringent specifications of the nuclear industry. The crosslinked polystyrene divinylbenzene matrix provides excellent resistance to physical breakdown. The high operating capacity of **Resinex™ NC-3010** will provide an ultra-pure process water and will exceed the requirements of the nuclear industry for low ion leaching in one-time-use applications. The low content of eluable chloride ions makes this product highly suitable for pressure water reactor applications at all standard concentrations of boric acid.

Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	gel-type, amber, spherical beads
Functional group	Sulfonic acid/quaternary amine
Whole bead count	95% min.
Ionic form, as shipped	H ⁺ /OH ⁻
Bead size	16x40 US mesh (0.42-1.25 mm)
Effective size	0.45 - 0.75 mm
Bulk density	720 kg/m ³
Real density	1.14 g/cm ³
Water retention	55-68%
Total capacity	1.00 eq/l min.
Storage temperature	0-40°C
Regeneration level H ⁺ , as shipped	99% min.
Regeneration level OH ⁻ , as shipped	95% min.

Standard Design Conditions

Bed depth	>600 mm
Operating temperature	60°C max.
Chloride content	0.3% max.
Sulfate content	0.2% max.
Pressure drop, max.	0.20 kPa* $\frac{h}{m^2}$

Key Features and Benefits

- **Specially pretreated**
Suitable for preparation of ultra-pure water
- **High Integrity Beads**
Excellent resistance to mechanical degradation ensures low pressure drop
- **Extended Operating Capacity**
Economical advantage
- **Outstanding Regeneration Level**
Enables a high running capacity in one-time-use applications
- **Low Content Of Eluable Chloride**
Specified in pressure water reactors at all common concentrations of boric acid

Typical Applications

- Ultra-pure water
- Radioactive waste water treatment
- Demineralisation and polishing in nuclear power stations.


Standard Packaging

- 25 lit. PE valve bags
- 1000 lit. big bags

Resinex™ NC-3010

Mixed bed ion exchange resin

Pressure Drop

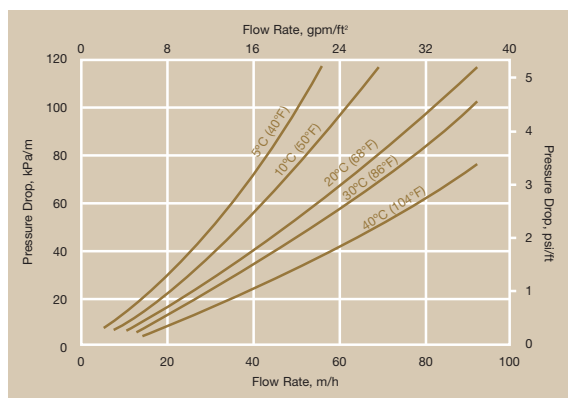

Product Packaging



25 lit. polyethylene valve bags,
48 bags per pallet



Polypropylene FIBCs
(big bags), 1000 lit.



NOTICE Jacobi Carbons reserves the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for the customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

CAUTION Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



SWEDEN

Jacobi Carbons AB
Varvsholmen
SE-392 30 Kalmar
Phone: +46-480-417550
Fax: +46-480-417559
Email: info@jacobi.net

FINLAND

Jacobi Carbons (SS)
Ratakatu 1b A3
FIN-00120 Helsinki
Phone: +358-9-643602
Fax: +358-9-642900
Email: infofin@jacobi.net

GERMANY

Jacobi Carbons GmbH
Feldbergstraße 21
D-60323 Frankfurt/Main
Phone: +49-69-719107-0
Fax: +49-69-719107-20
Email: info@jacobi.net

MALAYSIA

Jacobi Carbons (Asia) Sdn Bhd
1-04-18 Krystal Point Corp Park
Bayan Lepas, 11900 Penang
Phone: +60-4-6439828
Fax: +60-4-6443928
Email: infoasia@jacobi.net

UNITED KINGDOM

Jacobi Carbons Ltd
Njord House, Lord Street
Birkenhead, CH41 1HT
Phone: +44-151-649-8344
Fax: +44-151-649-8345
Email: info@jacobi.net

UNITED STATES

Jacobi Carbons, Inc.
1518 Walnut Street, Ste 1350
Philadelphia, PA 19102
Phone: +1 (215) 546-3900
Fax: +1 (215) 546-9921
Email: info@jacobi.net



WORLDWIDE DISTRIBUTORS A diverse network of agents, strategically located around the world

Resinex and Jacobi are trademarks of Jacobi Carbons. © Jacobi Carbons AB, 2004